
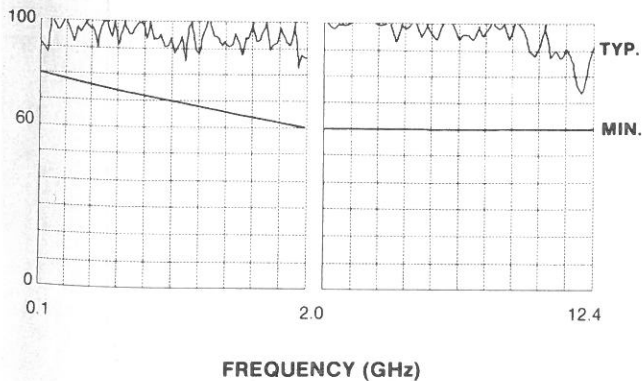
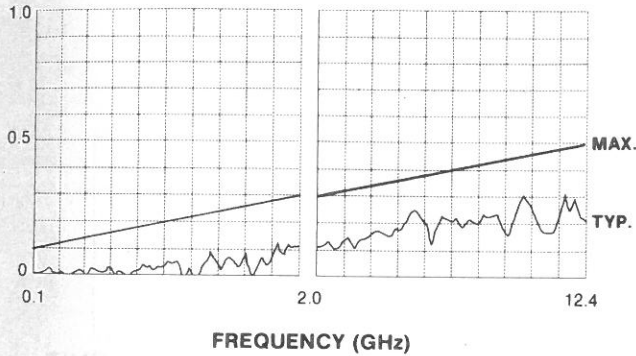


SPECIFICATIONS

Typical RF data of a production switch; computer printouts below:

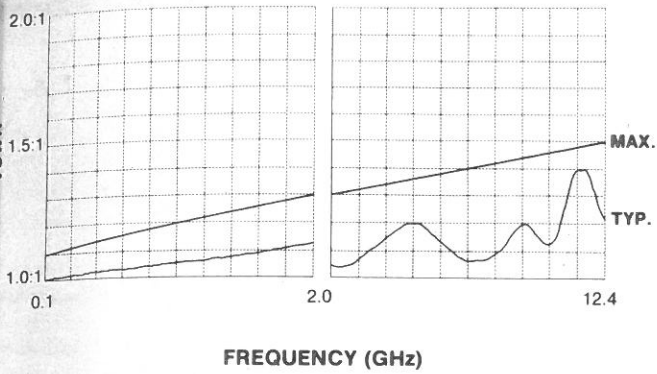

LOWER FREQUENCY

At 10 MHz, typical values are: Isolation, 90 dB; VSWR, 1.05:1; Insertion Loss, 0.05 dB. Because of the inherently good RF performance at lower frequencies, this product line is not tested below 2 GHz except upon request.

ACTUATING VOLTAGE	20 to 30 Vdc
CURRENT ACTUATING	1.0 amp max @ 28 Vdc & 20°C
HOLDING	.25 amp max @ 28 Vdc & 20°C
SWITCHING TIME	20 ms max RF to RF
RF CONTACTS	break-before-make
IMPEDANCE	50 ohms nominal
TEMPERATURE	-55°C to 85°C
VIBRATION	20 g's sine/random
LIFE	100,000 operations min
WEIGHT	12 oz max

DIMENSIONS

